



TECHNICAL DATA / FEATURES

- dimensions: $\phi 87 \times 72$
- luminous flux of the LED module: 2000 lm, 1500 lm, 1000 lm
- luminous flux of the lamp: 1600 lm, 1200 lm, 800 lm
- maximum power: 21W, 18W, 14.5W
- nominal voltage: 12V-24V DC
- permissible power supply voltage: 10.5V-30V DC
- source of light: 4 x LED
- colour temperature: 5700-7000K
- light distribution angle: 35°, 58°
- IP rating: IP67, IP69K, IP66
- work temperature: -40°C - +80°C
- housing's material: aluminium
- lens' material: plastic
- built-in connectors: AMP Faston 250, Deutsch DT, AMP SuperSeal 1.5
- other: protection:
 - against overheating
 - against reverse polarisation



ADDITIONAL INFORMATION

Work lamps are used to illuminate working space near vehicles, tractors, slow-moving machines and any other places where indicated voltage is available.

The lamps comply with EMC Directive 2004/108/EC. They do not emit electromagnetic interference as well as they are resistant to it's influence.

Correct polarity required.



Mounting: as a freestanding on body panels. They can be installed in any position (standing, hanging, on side).

It is possible to install needed connectors for a version with cable (on request).

Useful parts while installing:

- deutsch plug DT06-2S 2-pin - cat. No. A.07135
- AMP SuperSeal 1,5 plug 2-pin - cat. No. A.07137
- AMP Faston 250 plug 2-pin - cat. No. A.07138

DIMENSIONS

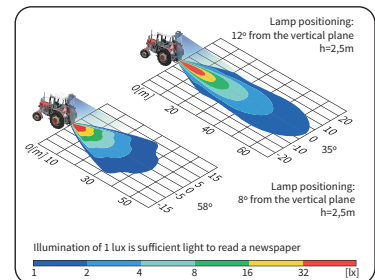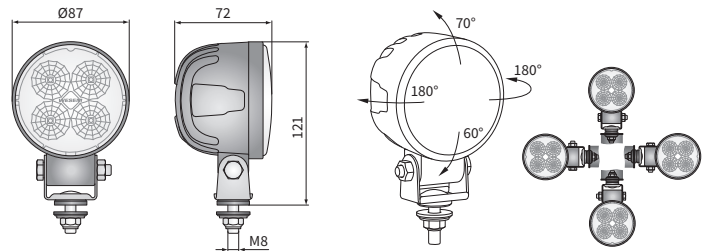

Cat. number	Luminous flux			Beam angle	IP rating	Accessories			Connectors	Cap / Pin	
	2000 lm	1500 lm	1000 lm			LED module 12V-24V	cable 0,5 m	cable 0,15 m			AMP Faston 250
CRC5K.54801	✓			58°	✓						
CRC5K.54806	✓			35°	✓				✓	2	
CRC5K.54814	✓				✓					2	
CRC5K.54815	✓				✓					✓	2
CRC5H.53301	✓				✓						
CRC5H.53306	✓				✓				✓		2
CRC5H.53314	✓				✓					✓	2
CRC5H.53315	✓				✓					✓	2
CRC5B.50001		✓			✓						
CRC5B.50006		✓			✓				✓		2
CRC5B.50014		✓			✓					✓	2
CRC5B.50002		✓			✓					✓	2
CRC5B.50015		✓			✓					✓	2
CRC5D.51601		✓			✓						

Cat. number	Luminous flux			Beam angle	IP rating	Accessories			Connectors	Cap / Pin	
	2000 lm	1500 lm	1000 lm			LED module 12V-24V	cable 0,5 m	cable 0,15 m			AMP Faston 250
CRC5D.51606		✓		58°	✓						2
CRC5D.51614		✓		35°	✓						2
CRC5D.51602		✓			✓						2
CRC5D.51615		✓			✓					✓	2
CRC5A.49401			✓		✓						
CRC5A.49406			✓		✓						2
CRC5A.49414			✓		✓						2
CRC5A.49402			✓		✓						2
CRC5A.49415			✓		✓						2
CRC5C.51501			✓		✓						2
CRC5C.51506			✓		✓					✓	2
CRC5C.51514			✓		✓						2
CRC5C.51502			✓		✓					✓	2
CRC5C.51515			✓		✓					✓	2