



TECHNICAL DATA / FEATURES

- dimensions: $\phi 117 \times 74$
- light functions: driving
- function markings: HR
- maximum power: 29W
- nominal voltage: 12V-24V DC
- permissible power supply voltage: 10.5V-30V DC
- reference mark: 12.5
- source of light: 6 x LED
- IP rating: IP67, IP69K, IP66
- work temperature: $-40^{\circ}\text{C} - +80^{\circ}\text{C}$
- housing's material: aluminium/plastic
- lens' material: glass
- built-in connectors: AMP Faston 250, Deutsch DT, AMP SuperSeal 1.5
- other: protection:
 - against overheating
 - against reverse polarisation
- bracket made of Inox steel



ADDITIONAL INFORMATION

Stylish and robust lamps dedicated for cars.

The lamps comply with EMC Directive 2004/108/EC. They do not emit electromagnetic interference as well as they are resistant to it's influence.

Correct polarity required.



Mounting: as a freestanding on body panels. They can be installed in any position (standing, hanging, on side).

It is possible to install needed connectors for a version with cable (on request).

Useful parts while installing:

- AMP Faston 250 plug 2-pin - cat. No. A.07138
- AMP SuperSeal 1,5 plug 2-pin - cat. No. A.07137
- deutsch plug DT06-2S 2-pin - cat. No. A.07135

DIMENSIONS

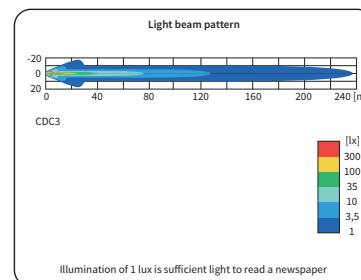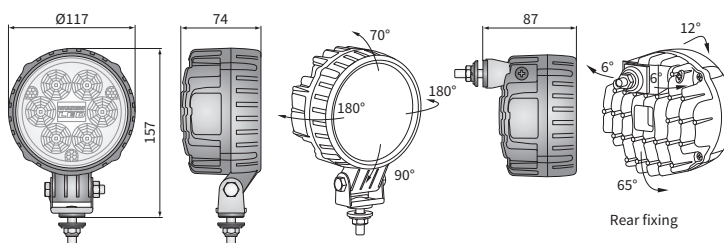

Cat. number	Homologation code	Light functions		Reference mark	IP rating	Accessories	Mounting method				Connectors				
		driving	12,5				LED module 12V-24V cable 0,5 m	installed vertically up	suspended	side	rear	AMP Faston 250	Deutsch DT	AMP SuperSeal 1,5	Cap / Pin
CDC3.51800	085	✓	✓	12,5		✓	✓	✓							
CDC3.51806	085	✓	✓	12,5	✓	✓	✓	✓	✓	✓		✓			2
CDC3.51807	085	✓	✓	12,5		✓	✓	✓	✓	✓		✓			2
CDC3.51808	085	✓	✓	12,5		✓	✓	✓	✓	✓			✓		2
CDC3.51820	085	✓	✓	12,5		✓	✓	✓	✓	✓					
CDC3.51821	085	✓	✓	12,5		✓	✓	✓	✓	✓		✓			2